

PROXIMITY READER CONTROL UNIT EVE196-X3-RS



REAL TIME



Anti-clone
Guarantee



Remote access




KEY FEATURES...

- MIFARE 13.56MHz proximity keys
- 3000 proximity key capacity
- Networkable device
- Time zone control
- 8 week types
- Email alerts
- Real time remote management
- Noralsy proximity keys with Anti-Clone Guarantee

PROXIMITY READER ACCESS CONTROL

| REFERENCE | EVE196-X3-RS |
|-----------------------------------|--|
| MECHANICAL CHARACTERISTICS | |
| Dimensions (HxWxD) | 85 x 53 x 20 mm |
| Weight | 80 g |
| Material | ABS |
| Screw fixings | M3 screws |
| ELECTRICAL CHARACTERISTICS | |
| Voltage | 12VDC-18VDC |
| Consumption | 225mA max (whilst relay is activated) |
| Relay | 1no 5 Amp rated NO/NC programmable |
| Operating temperature | -10°C to +55°C |
| Norms | EN50082 / EN55022 |
| FEATURES | |
| Bus | Max length 400 metres using Class E (CAT6) U/UTP in series |
| Device capacity | 3000 proximity keys |
| Input | 1no for exit button |
| Integral timeclock | Synchronises automatically with baticonnect.com |
| Alert | Email |
| Programming | www.baticonnect.com available 24/7/365 |

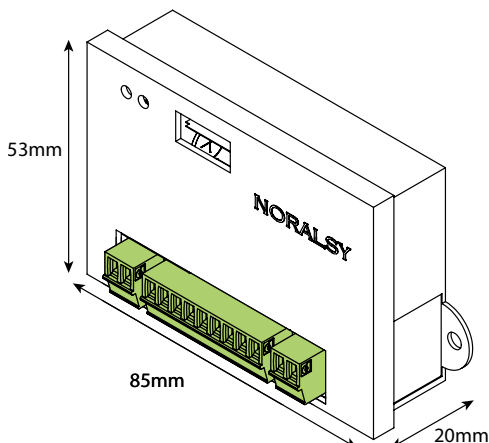

Secured by Design



Police Preferred Specification



24/7/365

www.baticonnect.com

08000 156496
 sales@ipdooreentry.co.uk
 www.ipdooreentry.co.uk
 f ipdooreentry

IP Door Entry Limited
 Unit DC4 Prologis Park
 Eastman Way
 Hemel Hempstead
 HP2 7DU